

DCS*
Digital Cell Scope
Sibress




Monitor-Image



**MF4x, MF10x ,MF25x,
MF40x**


XY MOVE SUPPORT

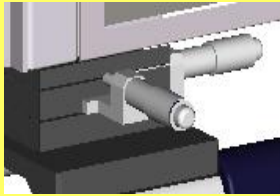

The precision mechanical frame is adjustable in two directions (X and Y), to capture desired field of view without adjusting the stand.



Full X, Y, Z Direction Measurement

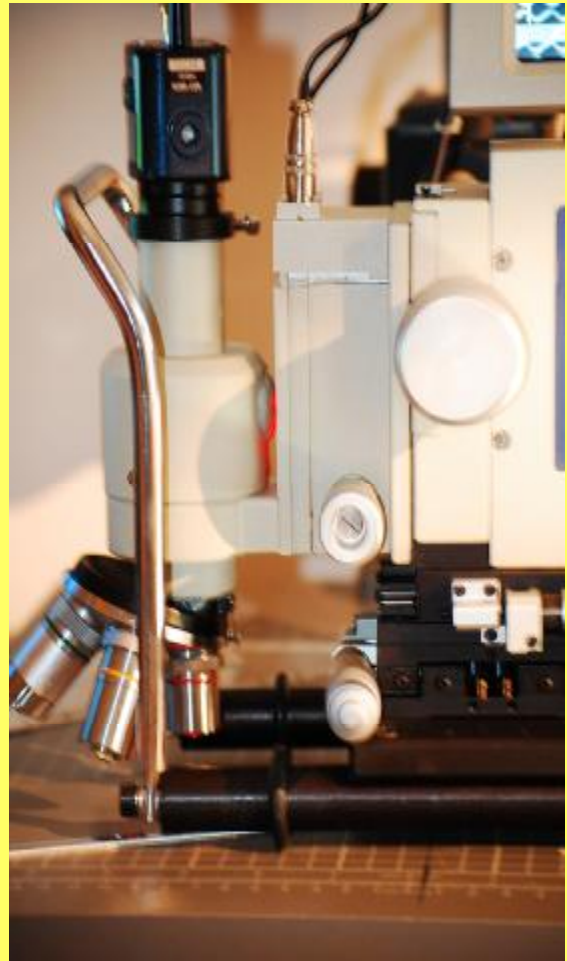

Multi precision optics on a turret mount

	Specification*
Illumination	build in
Lens system	MF4x, MF10x, MF25x, MF40x
Travel of the Z axis	1000 μ m
Travel of the X axis	25mm
Travel of the Y axis	25mm
Resolving power	1 μ m,(microshift adjustment)
Measuring precision	1 μ m
Power supply	DC 12v 20W
PC Requirements	Windows XP, 1GB Ram, USB2 port
*Changes without suppliers notification	

Sibress

SIBRESS, Bressanone: Für weitere Informationen bitte E-Mail an: info@sibress.com oder Fax: +39 0472 206532
 Pour les informations de plus, s'il vous plaît e-mail: info@sibress.com ou fax: +39 0472 206532