



The new Sibress SIS improves communication and helps sales, service, and technical personnel provide better answers to more quickly satisfy customers' needs. Quality control staff can make good use of the image marking functions to illustrate product defects and create standard operating procedures to improve quality

2.6 inch monitor for direct view



SD card port for images exchange

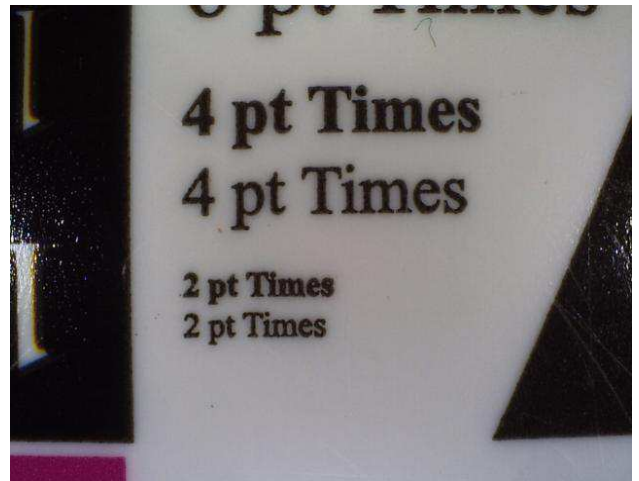

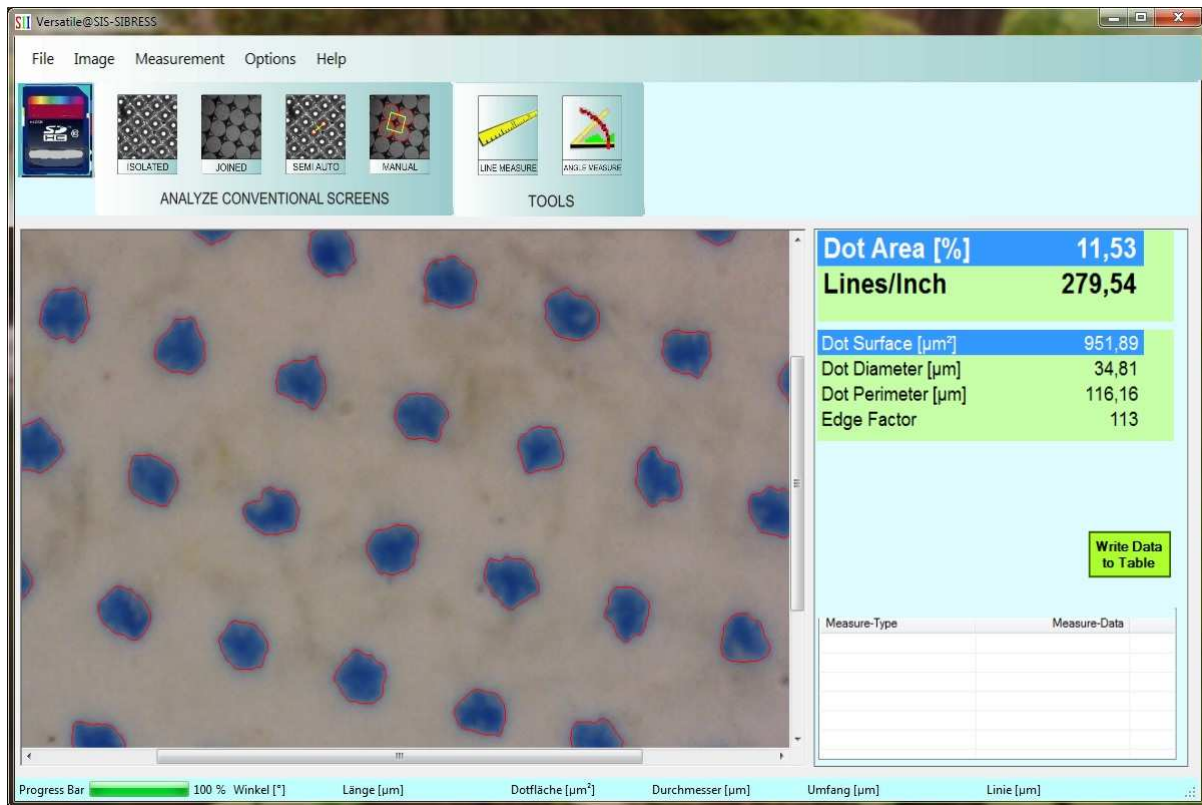

Full automatic analyses of your image

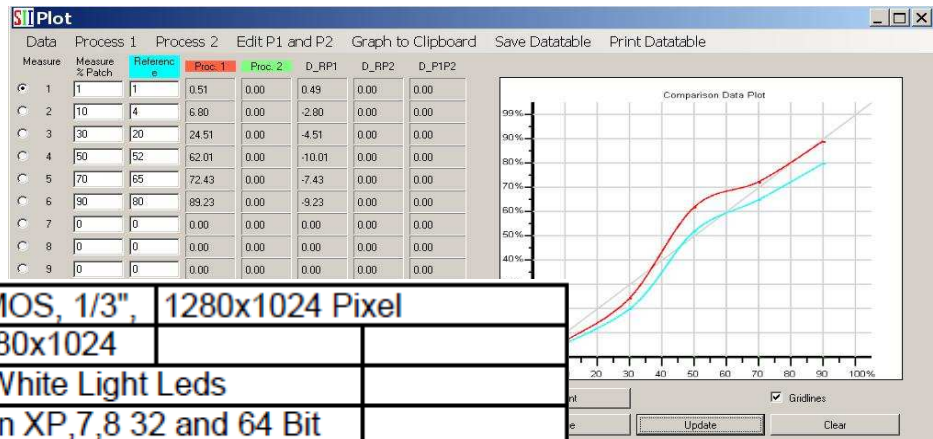


Image Sensor:	CMOS, 1/3"	1280x1024 Pixel
Pixels:	1280x1024	
Light Source:	4 White Light Leds	
Operating System:	Win XP, 7, 8 32 and 64 Bit	
Resolution:	VGA: 640x480 Pixel	
	1.3 M: 1280x690 Pixel	
	2.0M: 1600x1200 Pixel	
Video Output, PAL, NTSC ; VGA, QVGA		
Digital Zoom:	1x -4x	
Display:	2.4"/ 6 cm LCD Monitor	
USB Interface:	USB 1.1, MSD function	
Card:	SD storage card	

Data Table for comparison